


DRAWING APPROVAL

PLEASE CHECK THE APPROPRIATE BOXES
SIGN AND PRINT NAME


FINISHES	
CRITICAL DIMENSIONS (Red)	
HEIGHT	
WIDTH	

SIGNED BY _____
PRINT NAME _____
DATE _____

Please Note:-
1. Track Support beam must be level and straight
2. All openings must be Plumb.
3. Floor must be within +/- 2mm.
All this allows for maximum acoustic effect and operability.
If any problem occurs in any of these areas, the operation of the door will be compromised

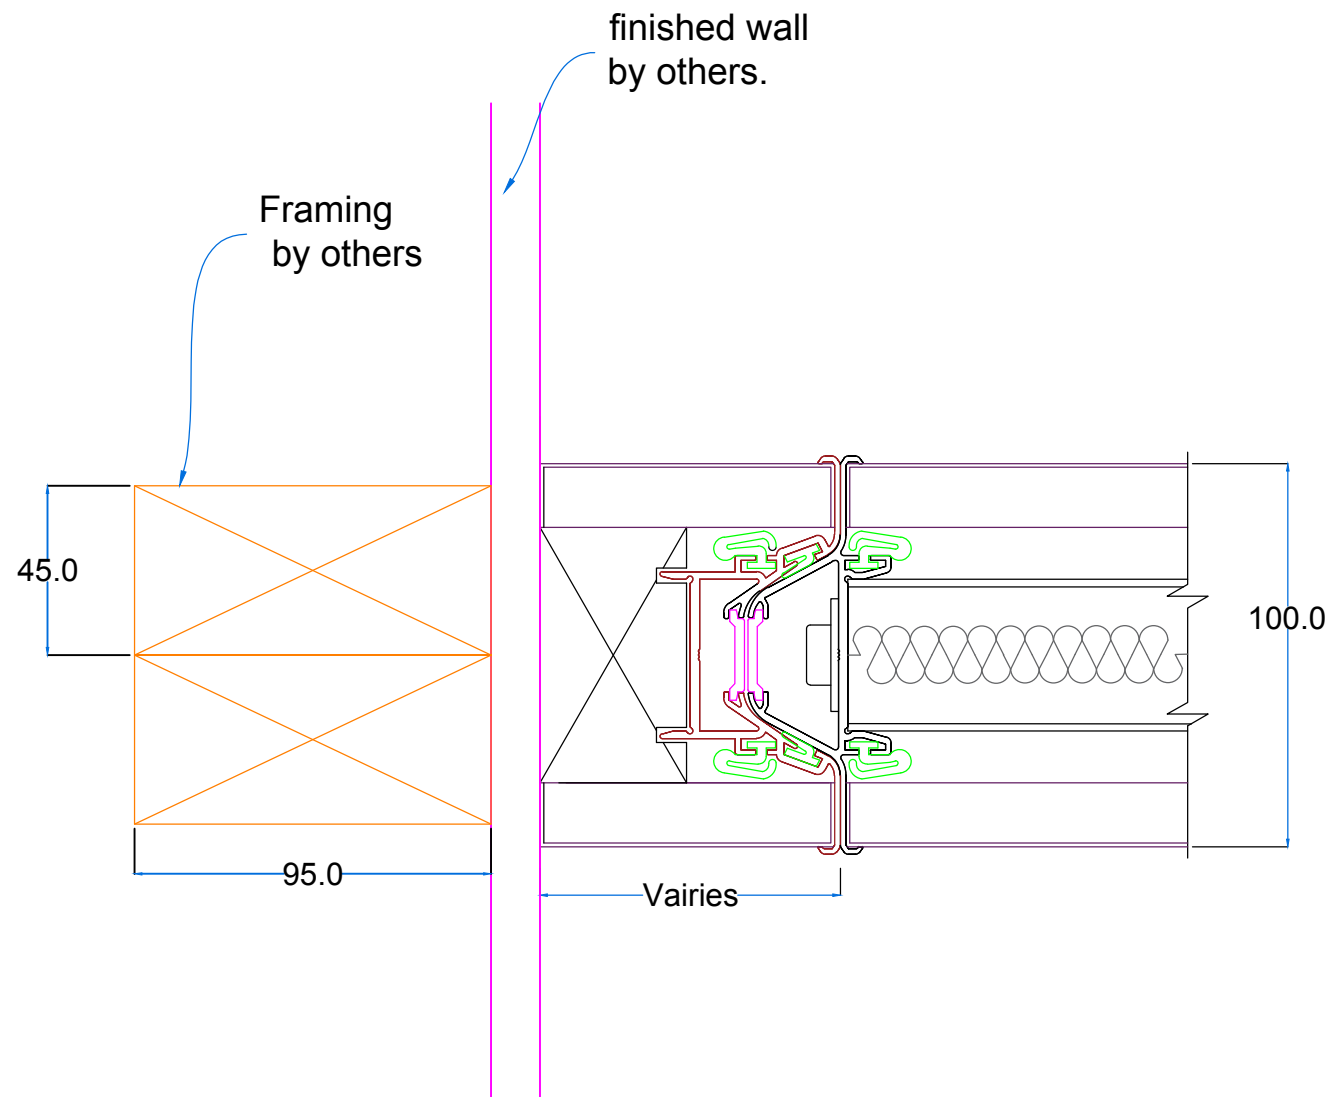

Each panel vertical edge incorporates a magnetic strip to assist connection

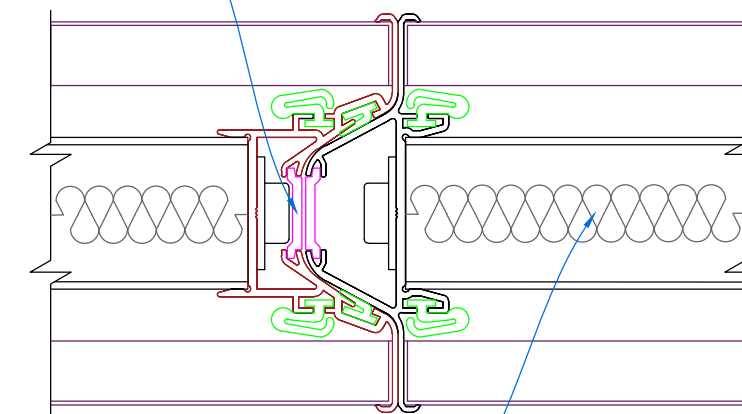

Cavity filled with 50kg/m3 (40mm) Acoustic Insulation

FOR REFERENCE ONLY

Section B-B

THESE DRAWINGS AND PRODUCTS MADE THEREFROM ARE SUBJECT TO COPYRIGHT UNDER THE NEW ZEALAND COPYRIGHT ACT 1994 AND NEITHER THE DRAWINGS OR PRODUCTS MADE THEREFROM MAY BE REPRODUCED IN ANY MATERIAL FORM OR MODIFIED IN ANYWAY WITHOUT THE WRITTEN APPROVAL OF TRANS-SPACE Ltd.

Rev	Date	Change	Name

TRACK TYPE	Generic
FINISH	Default

GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED	THIRD ANGLE PROJECTION
0 = +/- 0.5 0.0 = +/- 0.1 0.00 = +/- 0.05	
UNLESS OTHERWISE SPECIFIED	DIMENSIONS IN MILLIMETRES
MACHINED SURFACE FINISH UNLESS OTHERWISE SPECIFIED	CONTRACTOR

DESIGNER	REV	2
DRAWN	TONY W	A3
CHECKED	TG/WP	SHEET 1
DATE	26-Feb-18	SCALE NTS

TRANS-SPACE	MANAGING SPACE WITH OPERABLE WALLS AND DOORS
PROJECT DESCRIPTION	100 U.SL Detail
CONFIGURATION	JOB NUMBER