


Please Note:-
 1. Track Support beam must be level and straight
 2. All openings must be Plumb.
 3. Floor must be made level to +/- 5mm.
 All this allows for maximum acoustic effect and operability.
 If any problem occurs in any of these areas, the operation of the door will be compromised

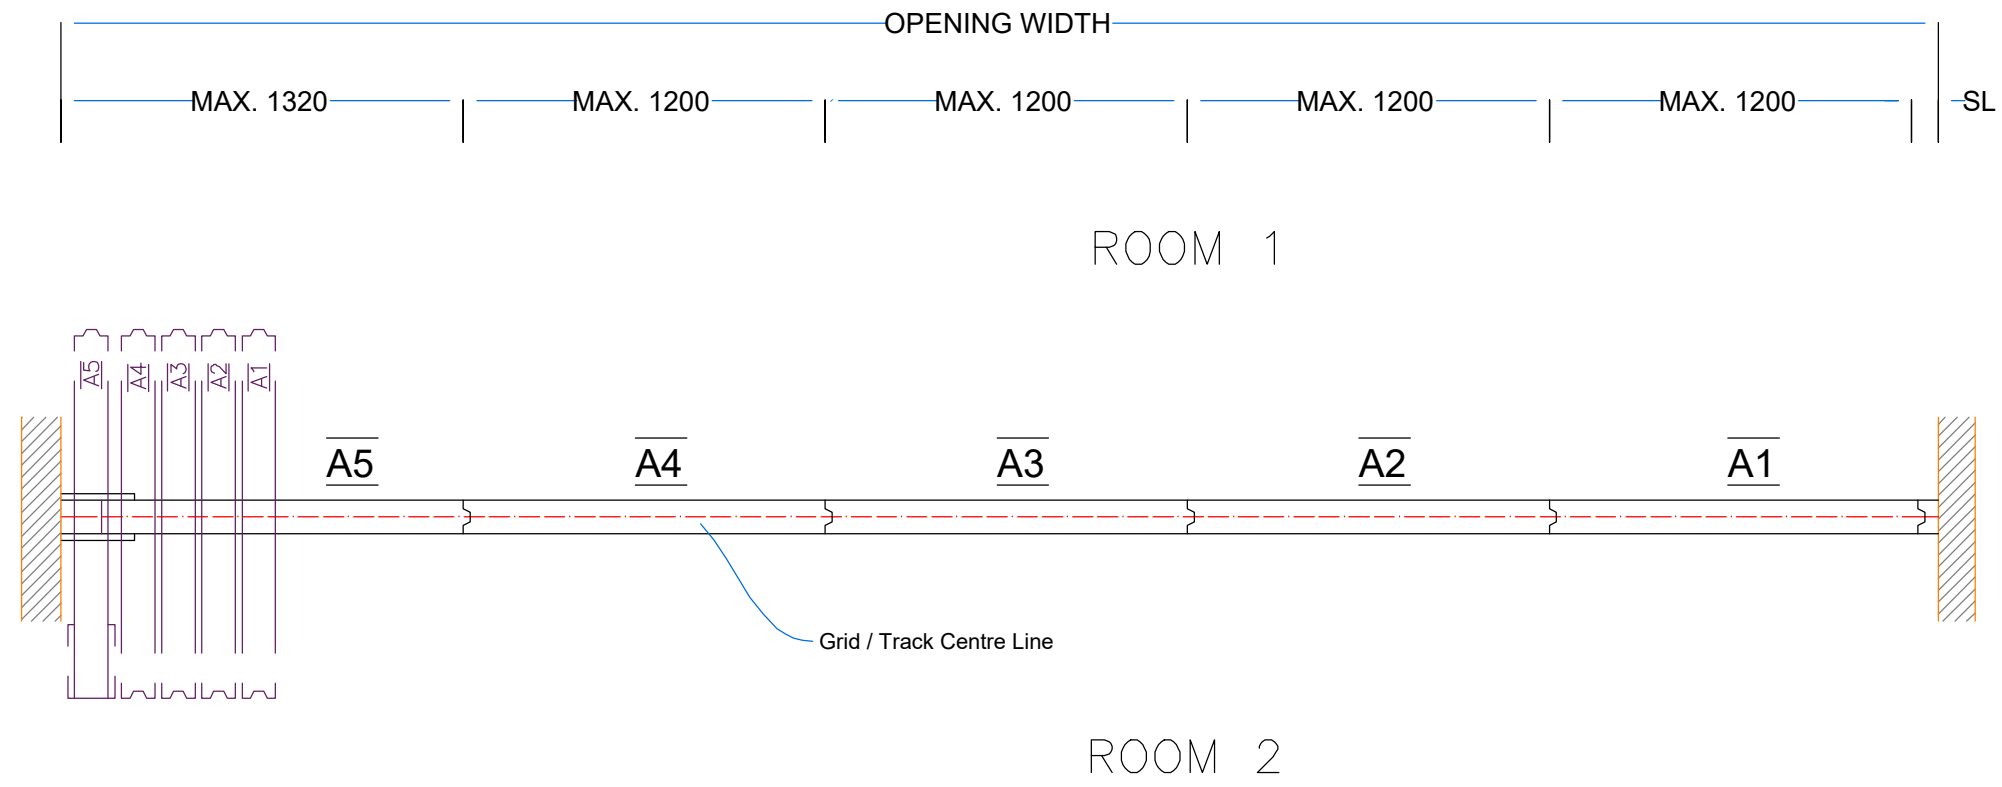


STACKING STYLE GRD00
(FOR 1 POINT SUSPENSION ONLY)

FOR REFERENCE ONLY

GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED 0 = +/- 0.5 0.0 = +/- 0.1 0.00 = +/- 0.05	THIRD ANGLE PROJECTION 	DESIGNER	REV 1	MANAGING SPACE WITH OPERABLE WALLS AND DOORS
		DRAWN Gary	A3	
UNLESS OTHERWISE SPECIFIED 0.1 1.6	DIMENSIONS IN MILLIMETRES	CHECKED Woody	SHEET 1	PROJECT DESCRIPTION
		DATE April 11, 2022	SCALE NTS	CONFIGURATION
MACHINED SURFACE FINISH UNLESS OTHERWISE SPECIFIED	CONTRACTOR	JOB NUMBER		TR-D-00


Please Note:-
 1. Track Support beam must be level and straight
 2. All openings must be Plumb.
 3. Floor must be made level to +/- 5mm.
 All this allows for maximum acoustic effect and operability.
 If any problem occurs in any of these areas, the operation of the door will be compromised

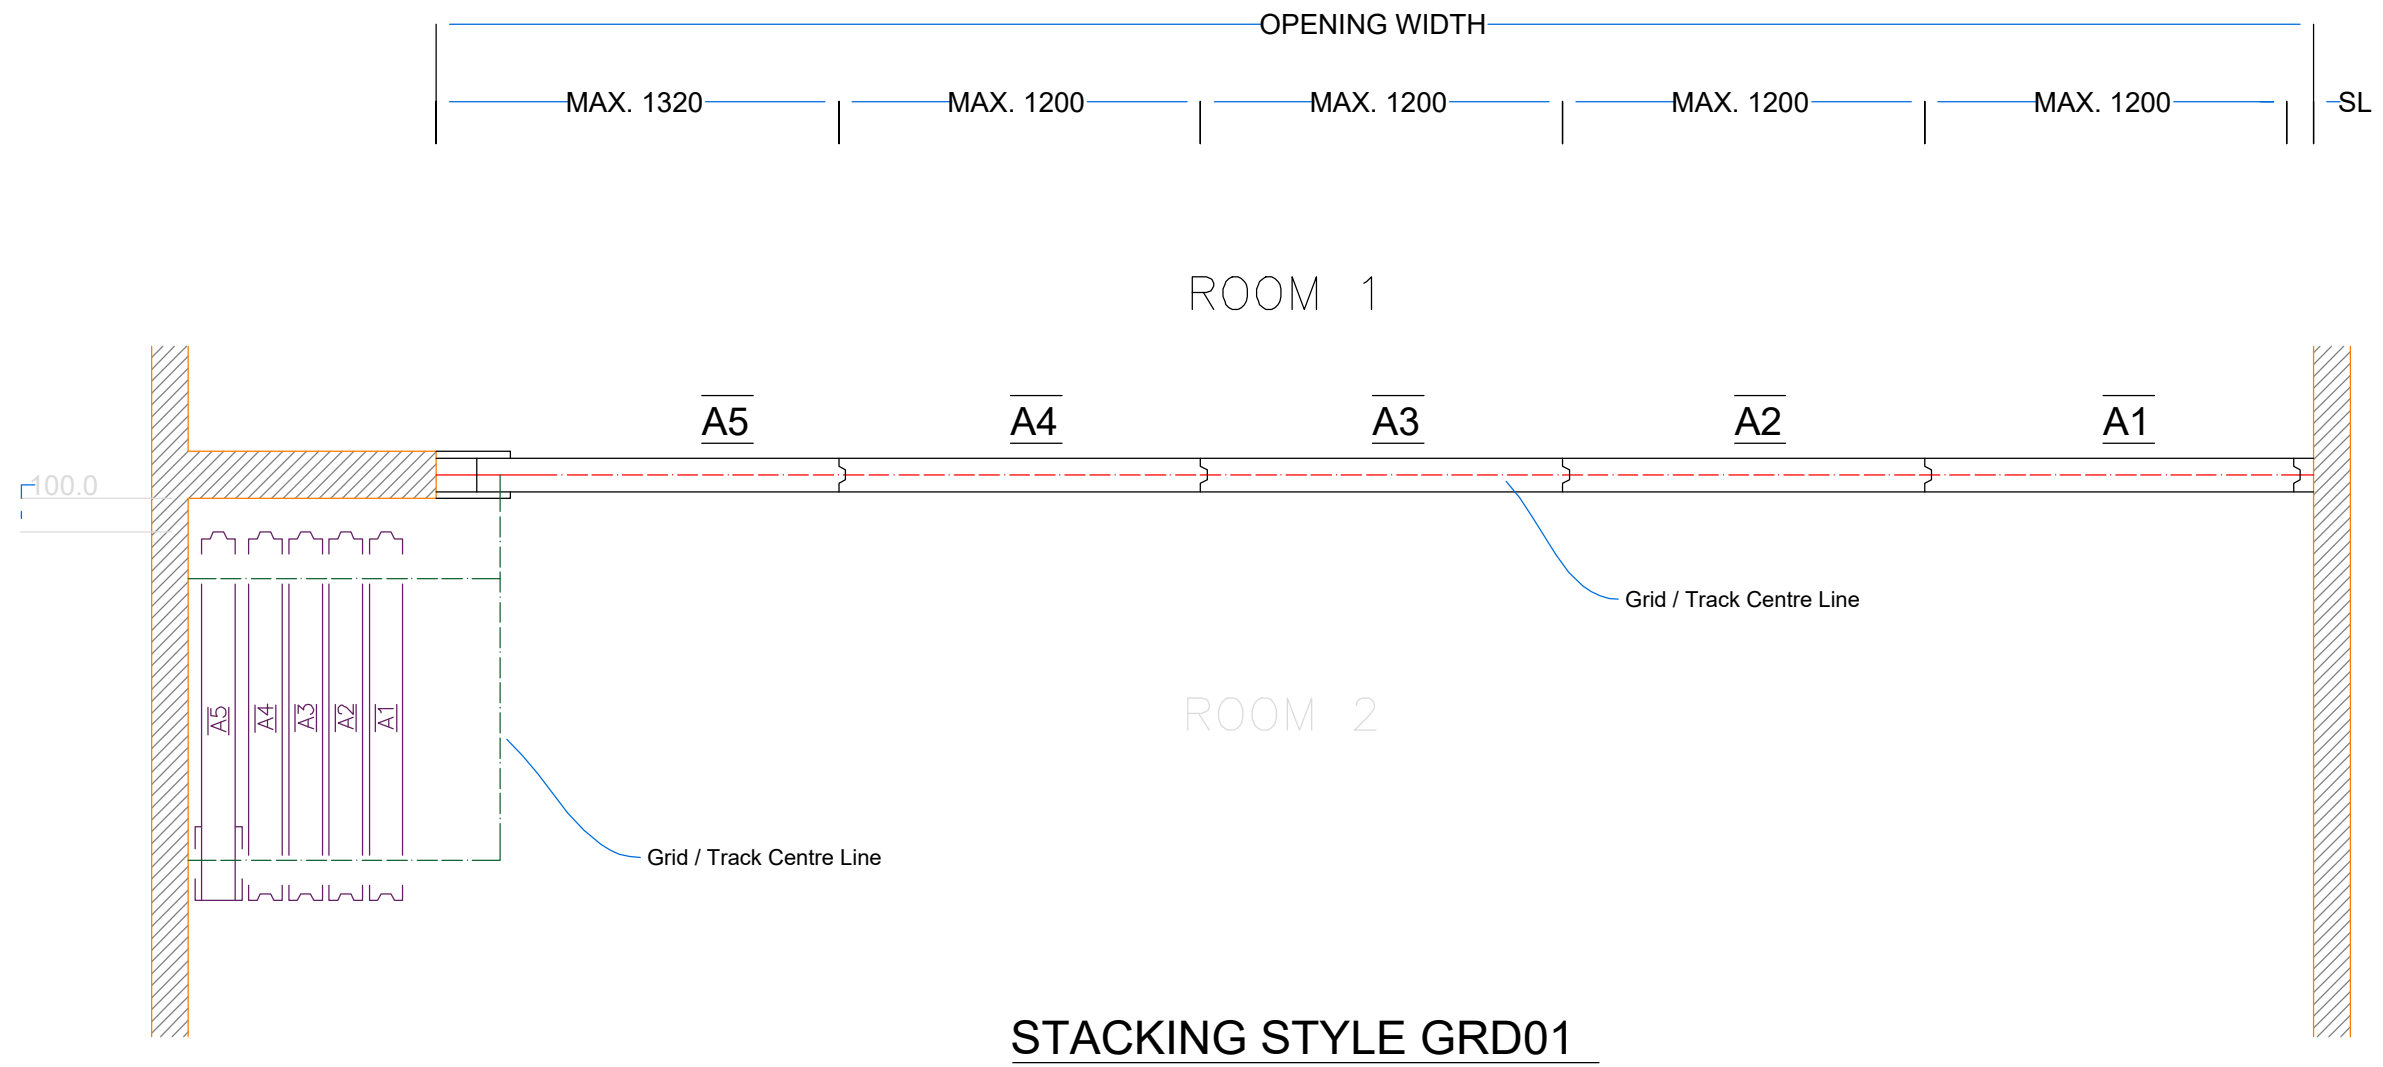

FOR REFERENCE ONLY

GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED 0 = +/- 0.5 0.0 = +/- 0.1 0.00 = +/- 0.05	THIRD ANGLE PROJECTION 	DESIGNER	REV 1	TRANS-SPACE MANAGING SPACE WITH OPERABLE WALLS AND DOORS
		DRAWN Gary	A3	
0.1 UNLESS OTHERWISE SPECIFIED	DIMENSIONS IN MILLIMETRES	CHECKED Woody	SHEET 1	PROJECT DESCRIPTION TRANS-SPACE DETAIL
		DATE April 11, 2022	SCALE NTS	CONFIGURATION STACKING STYLE GRD01
MACHINED SURFACE FINISH UNLESS OTHERWISE SPECIFIED 1.6/√	CONTRACTOR	JOB NUMBER		TR-D-01

Please Note:-
 1. Track Support beam must be level and straight
 2. All openings must be Plumb.
 3. Floor must be made level to +/- 5mm.
 All this allows for maximum acoustic effect and operability.
 If any problem occurs in any of these areas, the operation of the door will be compromised

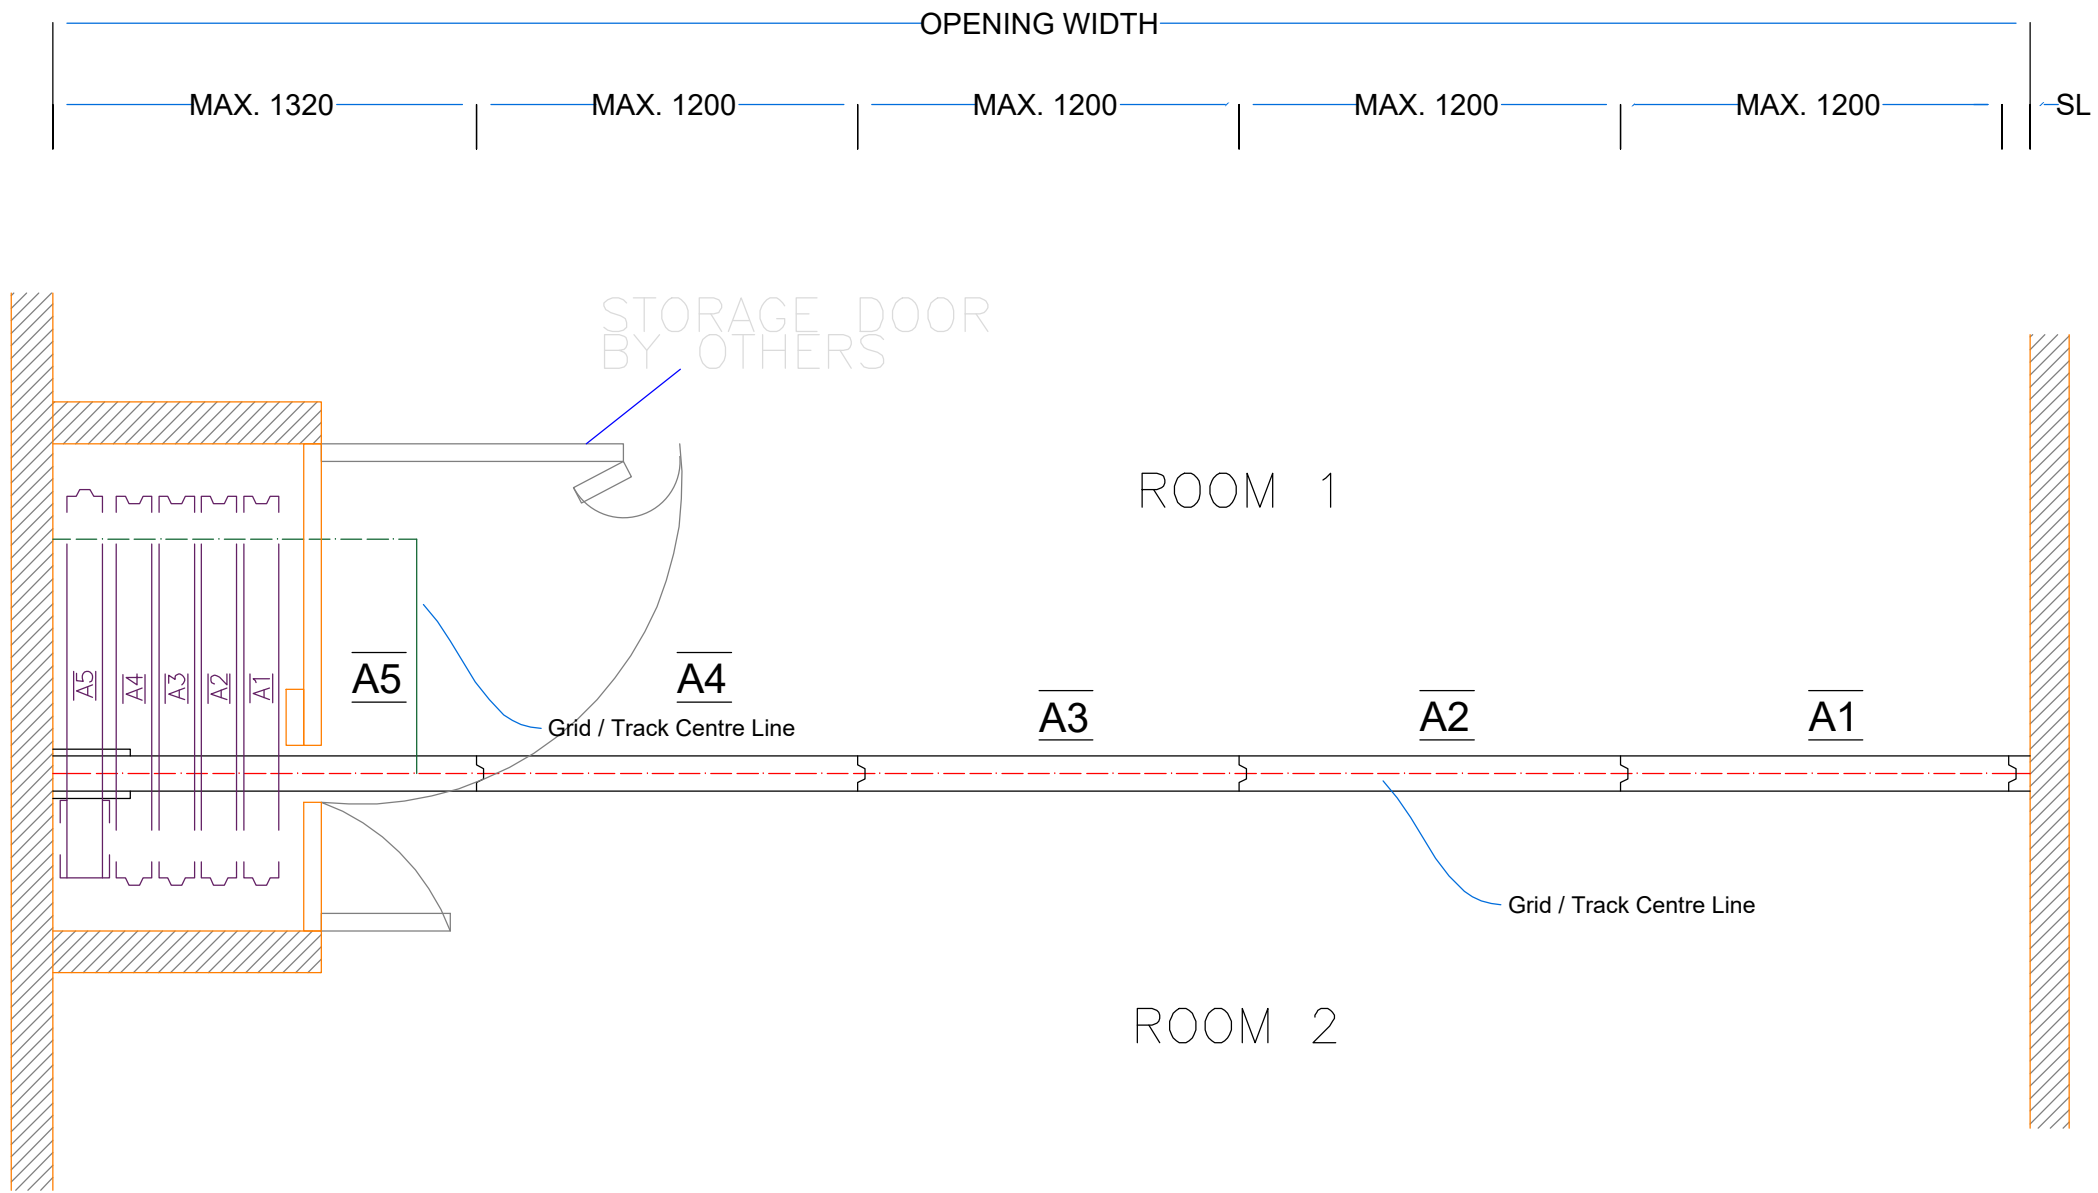


STACKING STYLE GRD 02

FOR REFERENCE ONLY

GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED 0 = +/- 0.5 0.0 = +/- 0.1 0.00 = +/- 0.05	THIRD ANGLE PROJECTION 	DESIGNER	REV 1	MANAGING SPACE WITH OPERABLE WALLS AND DOORS
		DRAWN Gary	A3	
UNLESS OTHERWISE SPECIFIED 0.1 1.6	DIMENSIONS IN MILLIMETRES	CHECKED Woody	SHEET 1	PROJECT DESCRIPTION
		DATE April 11, 2022	SCALE NTS	CONFIGURATION
MACHINED SURFACE FINISH UNLESS OTHERWISE SPECIFIED	CONTRACTOR	JOB NUMBER		TR-D-02

Please Note:-
 1. Track Support beam must be level and straight
 2. All openings must be Plumb.
 3. Floor must be made level to +/- 5mm.
 All this allows for maximum acoustic effect and operability.
 If any problem occurs in any of these areas, the operation of the door will be compromised


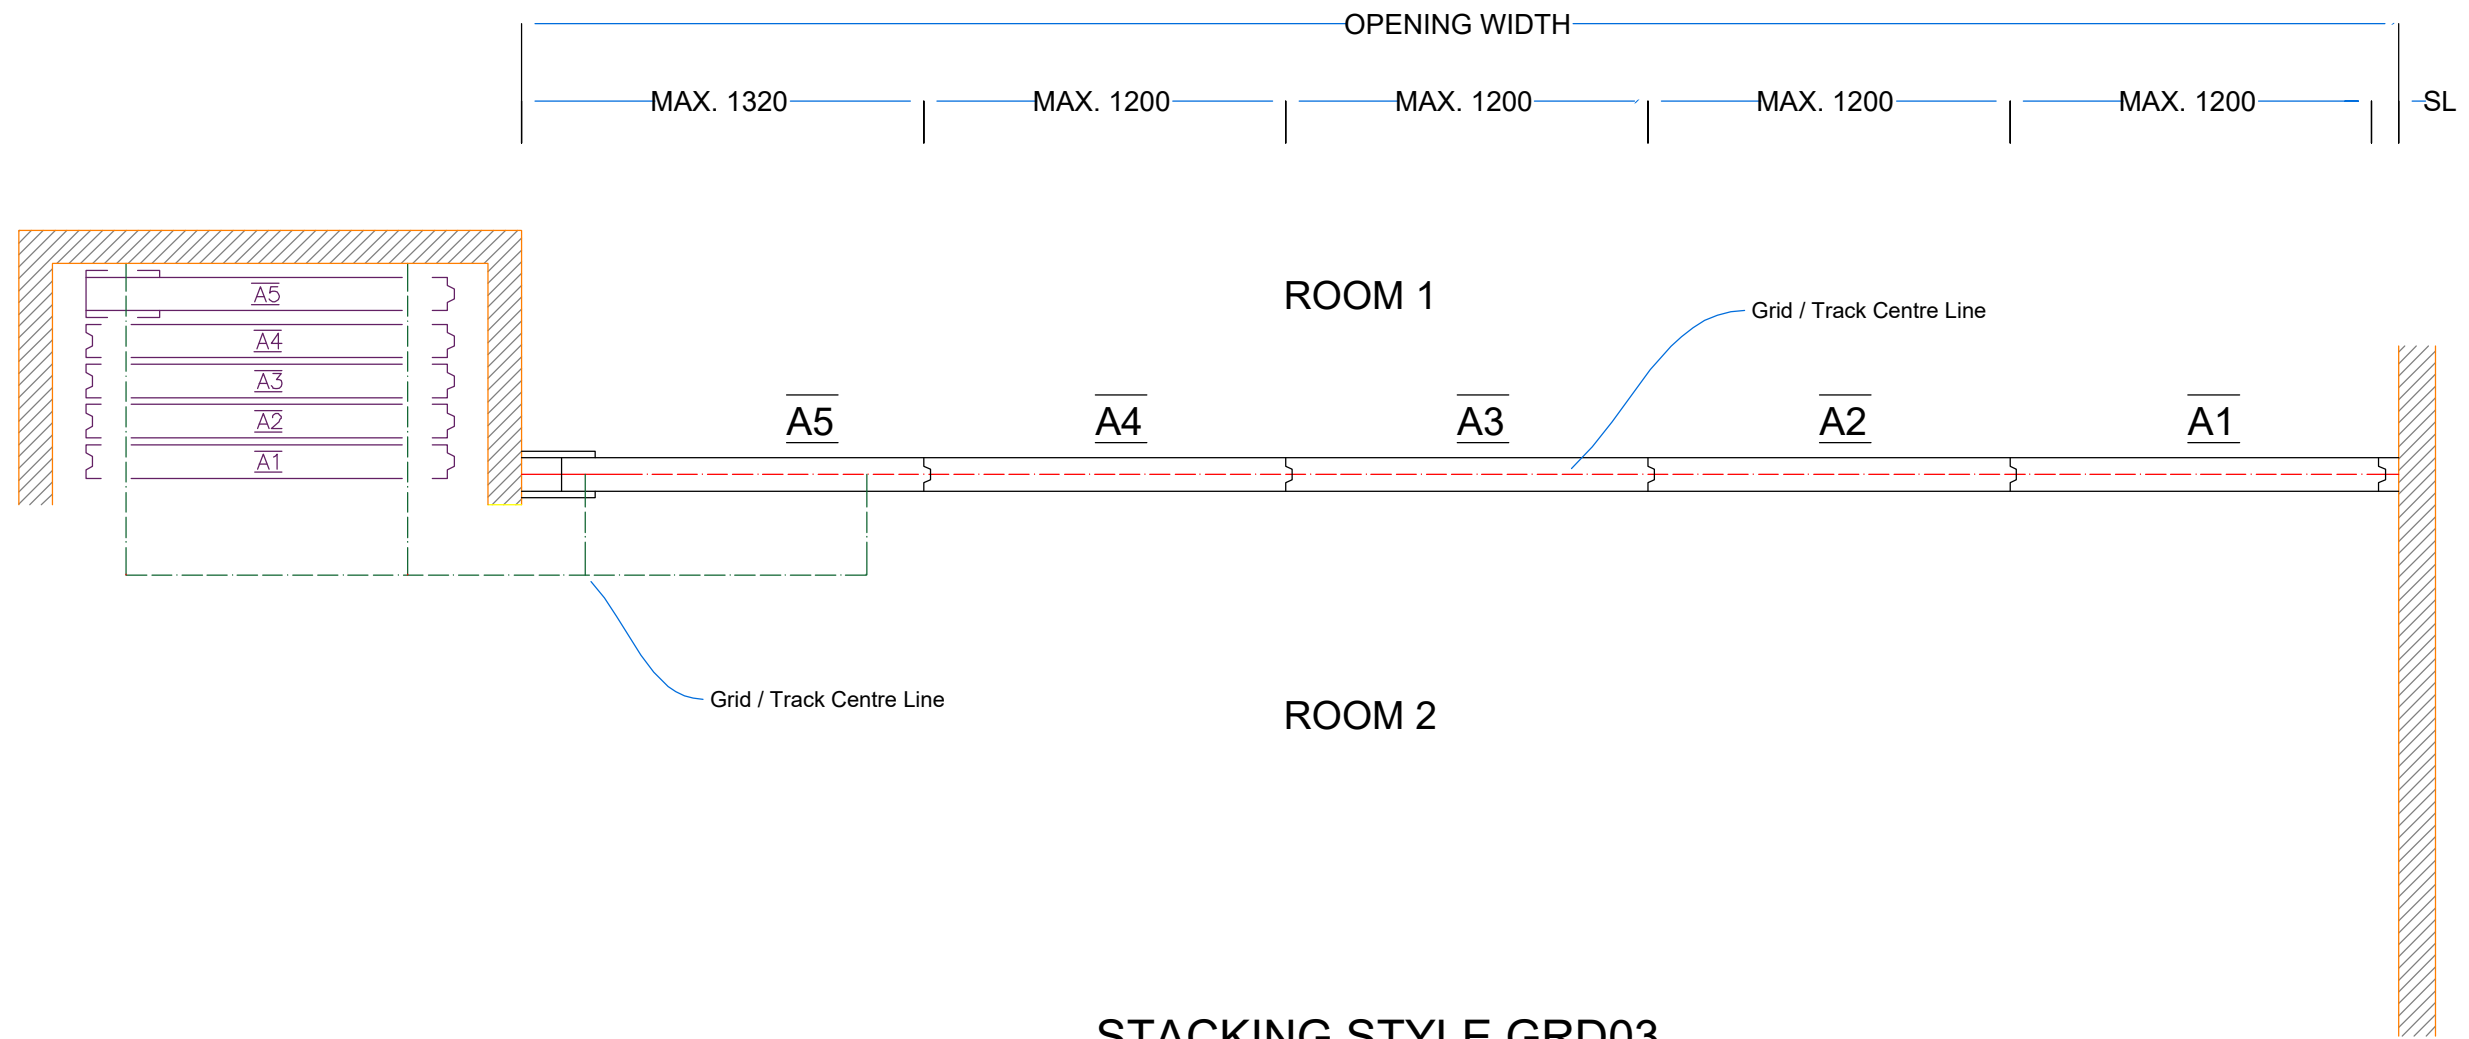


STACKING STYLE GRD03

FOR REFERENCE ONLY

GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED 0 = +/- 0.5 0.0 = +/- 0.1 0.00 = +/- 0.05	THIRD ANGLE PROJECTION 	DESIGNER	REV 1	MANAGING SPACE WITH OPERABLE WALLS AND DOORS
		DRAWN Gary	A3	
UNLESS OTHERWISE SPECIFIED 0.1	DIMENSIONS IN MILLIMETRES	CHECKED Woody	SHEET 1	PROJECT DESCRIPTION TRANS-SPACE DETAIL
		DATE April 11, 2022	SCALE NTS	CONFIGURATION STACKING STYLE GRD03
MACHINED SURFACE FINISH UNLESS OTHERWISE SPECIFIED $1.6/\sqrt{\quad}$	CONTRACTOR	JOB NUMBER		TR-D-03

Please Note:-
 1. Track Support beam must be level and straight
 2. All openings must be Plumb.
 3. Floor must be made level to +/- 5mm.
 All this allows for maximum acoustic effect and operability.
 If any problem occurs in any of these areas, the operation of the door will be compromised

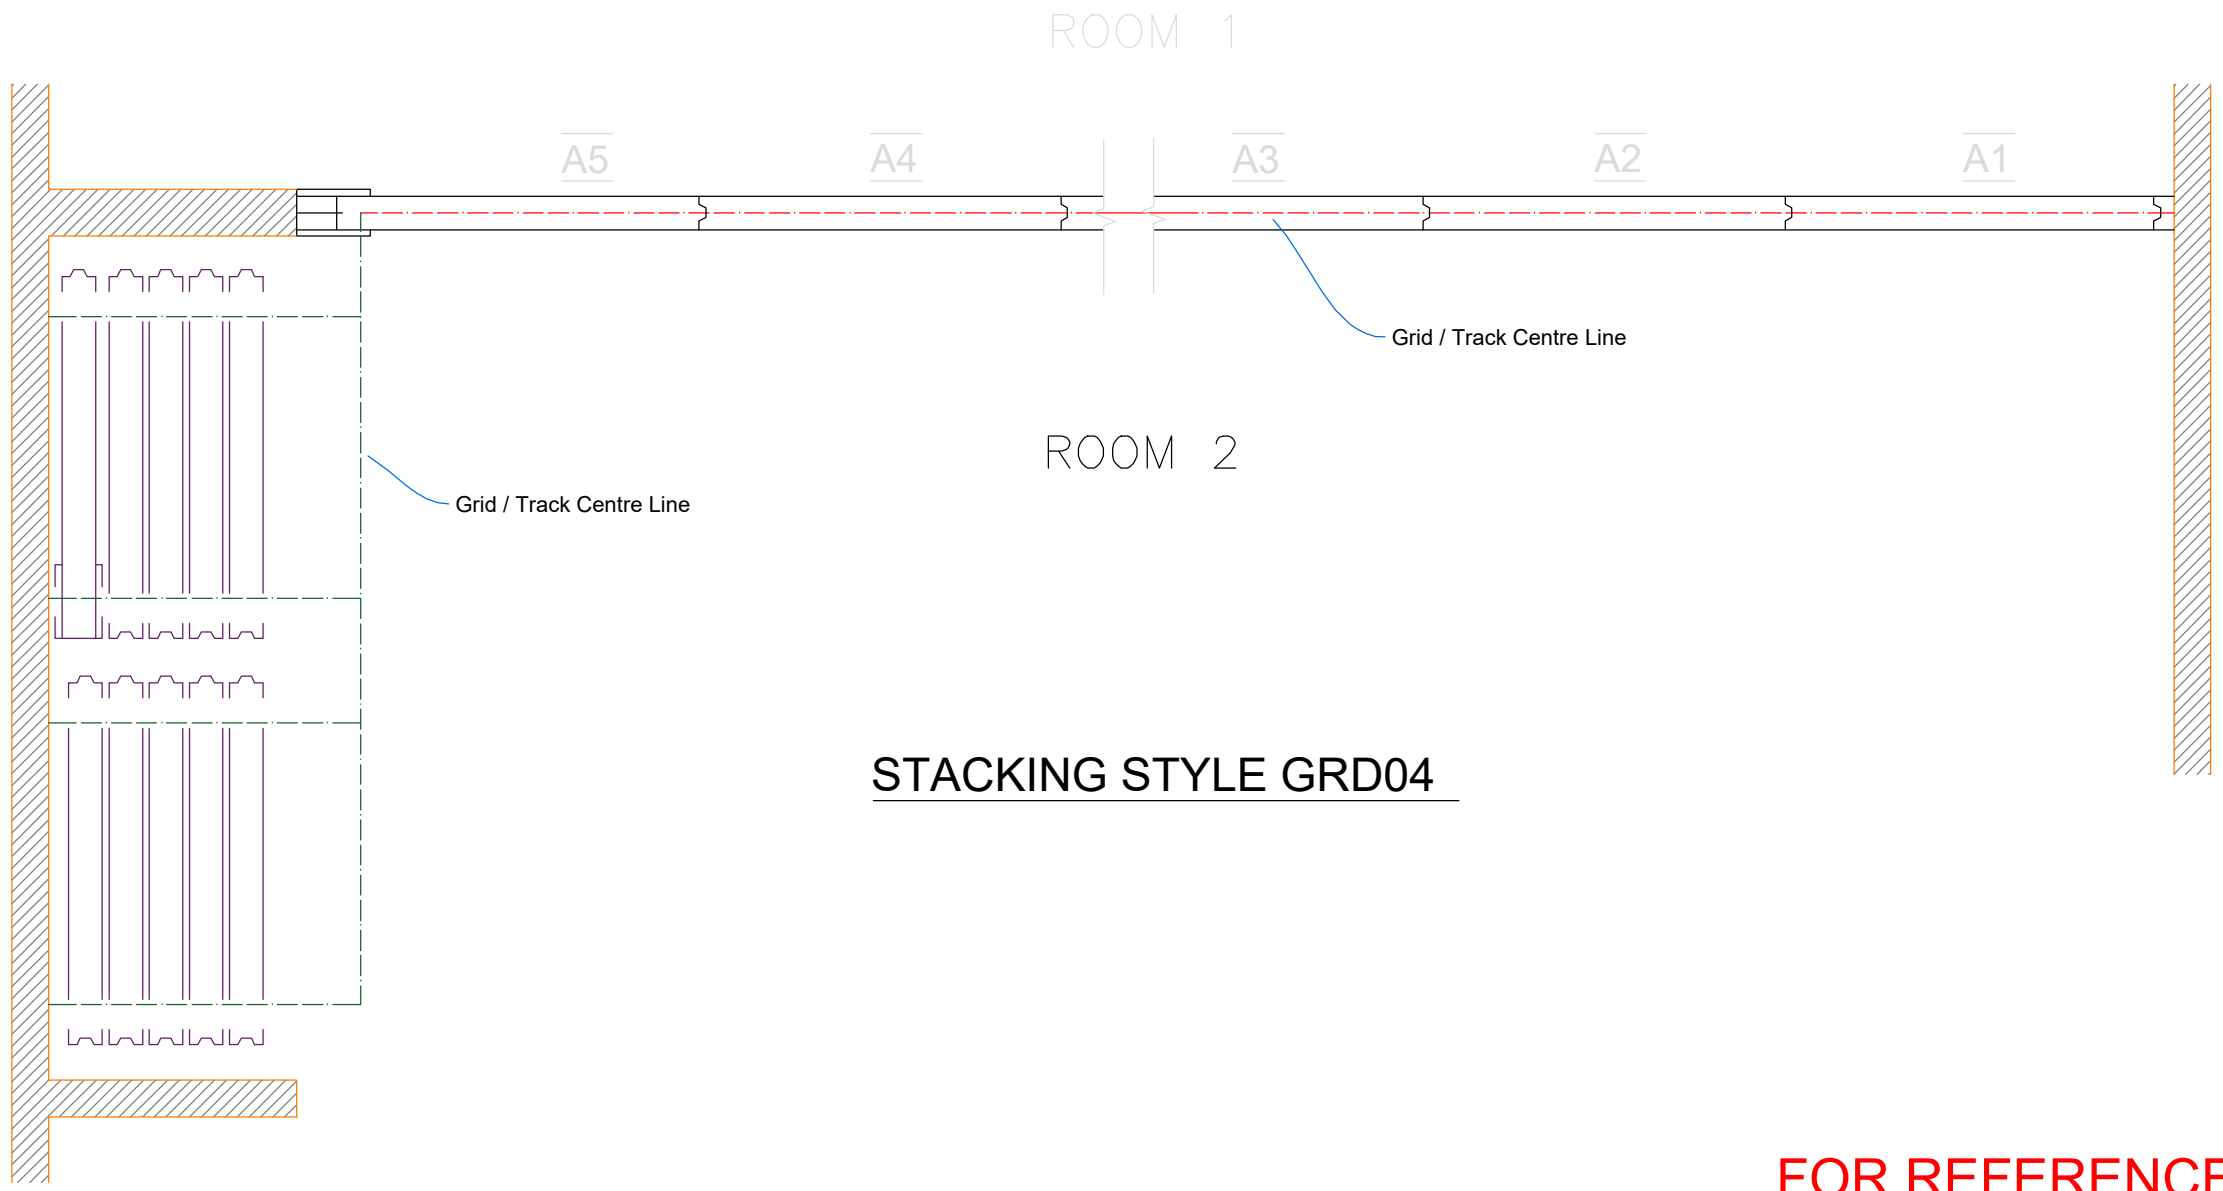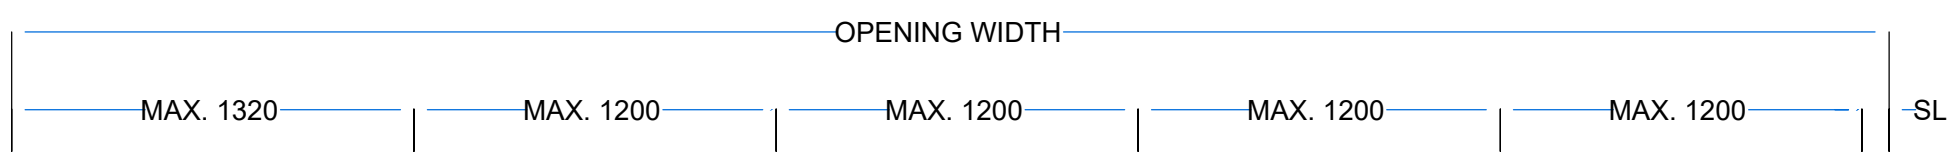


STACKING STYLE GRD04

FOR REFERENCE ONLY

GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED 0 = +/- 0.5 0.0 = +/- 0.1 0.00 = +/- 0.05	THIRD ANGLE PROJECTION 	DESIGNER	REV 1	MANAGING SPACE WITH OPERABLE WALLS AND DOORS
		DRAWN Gary	A3	
UNLESS OTHERWISE SPECIFIED 0.1	DIMENSIONS IN MILLIMETRES	CHECKED Woody	SHEET 1	PROJECT DESCRIPTION
		DATE April 11, 2022	SCALE NTS	CONFIGURATION
MACHINED SURFACE FINISH UNLESS OTHERWISE SPECIFIED $1.6/\sqrt{\quad}$	CONTRACTOR	CONFIGURATION STACKING STYLE GRD04		JOB NUMBER TR-D-04

Please Note:-
 1. Track Support beam must be level and straight
 2. All openings must be Plumb.
 3. Floor must be made level to +/- 5mm.
 All this allows for maximum acoustic effect and operability.
 If any problem occurs in any of these areas, the operation of the door will be compromised

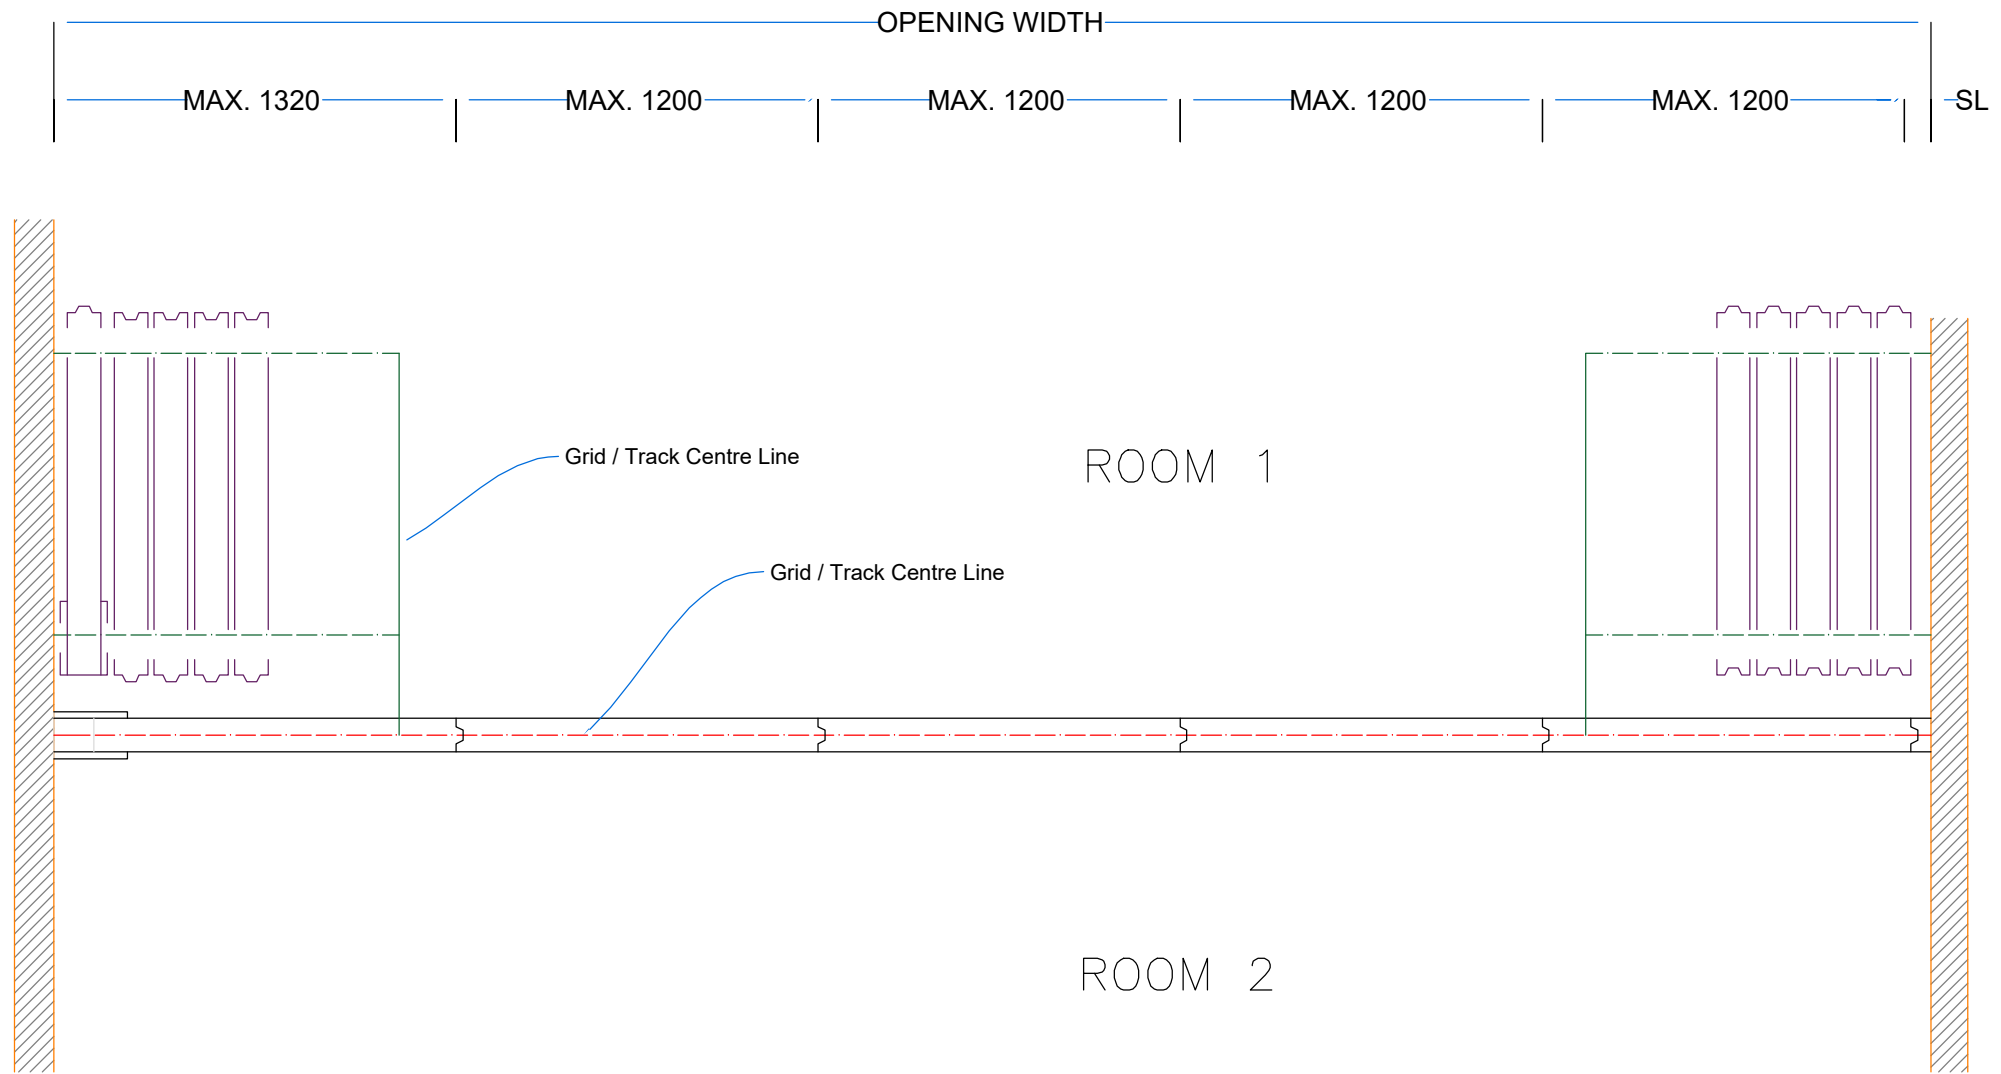


STACKING STYLE GRD05

FOR REFERENCE ONLY

GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED 0 = +/- 0.5 0.0 = +/- 0.1 0.00 = +/- 0.05	THIRD ANGLE PROJECTION 	DESIGNER	REV 1	MANAGING SPACE WITH OPERABLE WALLS AND DOORS
		DRAWN Gary	A3	
0.1 UNLESS OTHERWISE SPECIFIED	DIMENSIONS IN MILLIMETRES	CHECKED Woody	SHEET 1	PROJECT DESCRIPTION
		DATE April 11, 2022	SCALE NTS	CONFIGURATION
MACHINED SURFACE FINISH UNLESS OTHERWISE SPECIFIED $1.6/\sqrt{\quad}$	CONTRACTOR	CONFIGURATION		STACKING STYLE GRD05
				JOB NUMBER
				TR-D-05

Please Note:-
 1. Track Support beam must be level and straight
 2. All openings must be Plumb.
 3. Floor must be made level to +/- 5mm.
 All this allows for maximum acoustic effect and operability.
 If any problem occurs in any of these areas, the operation of the door will be compromised

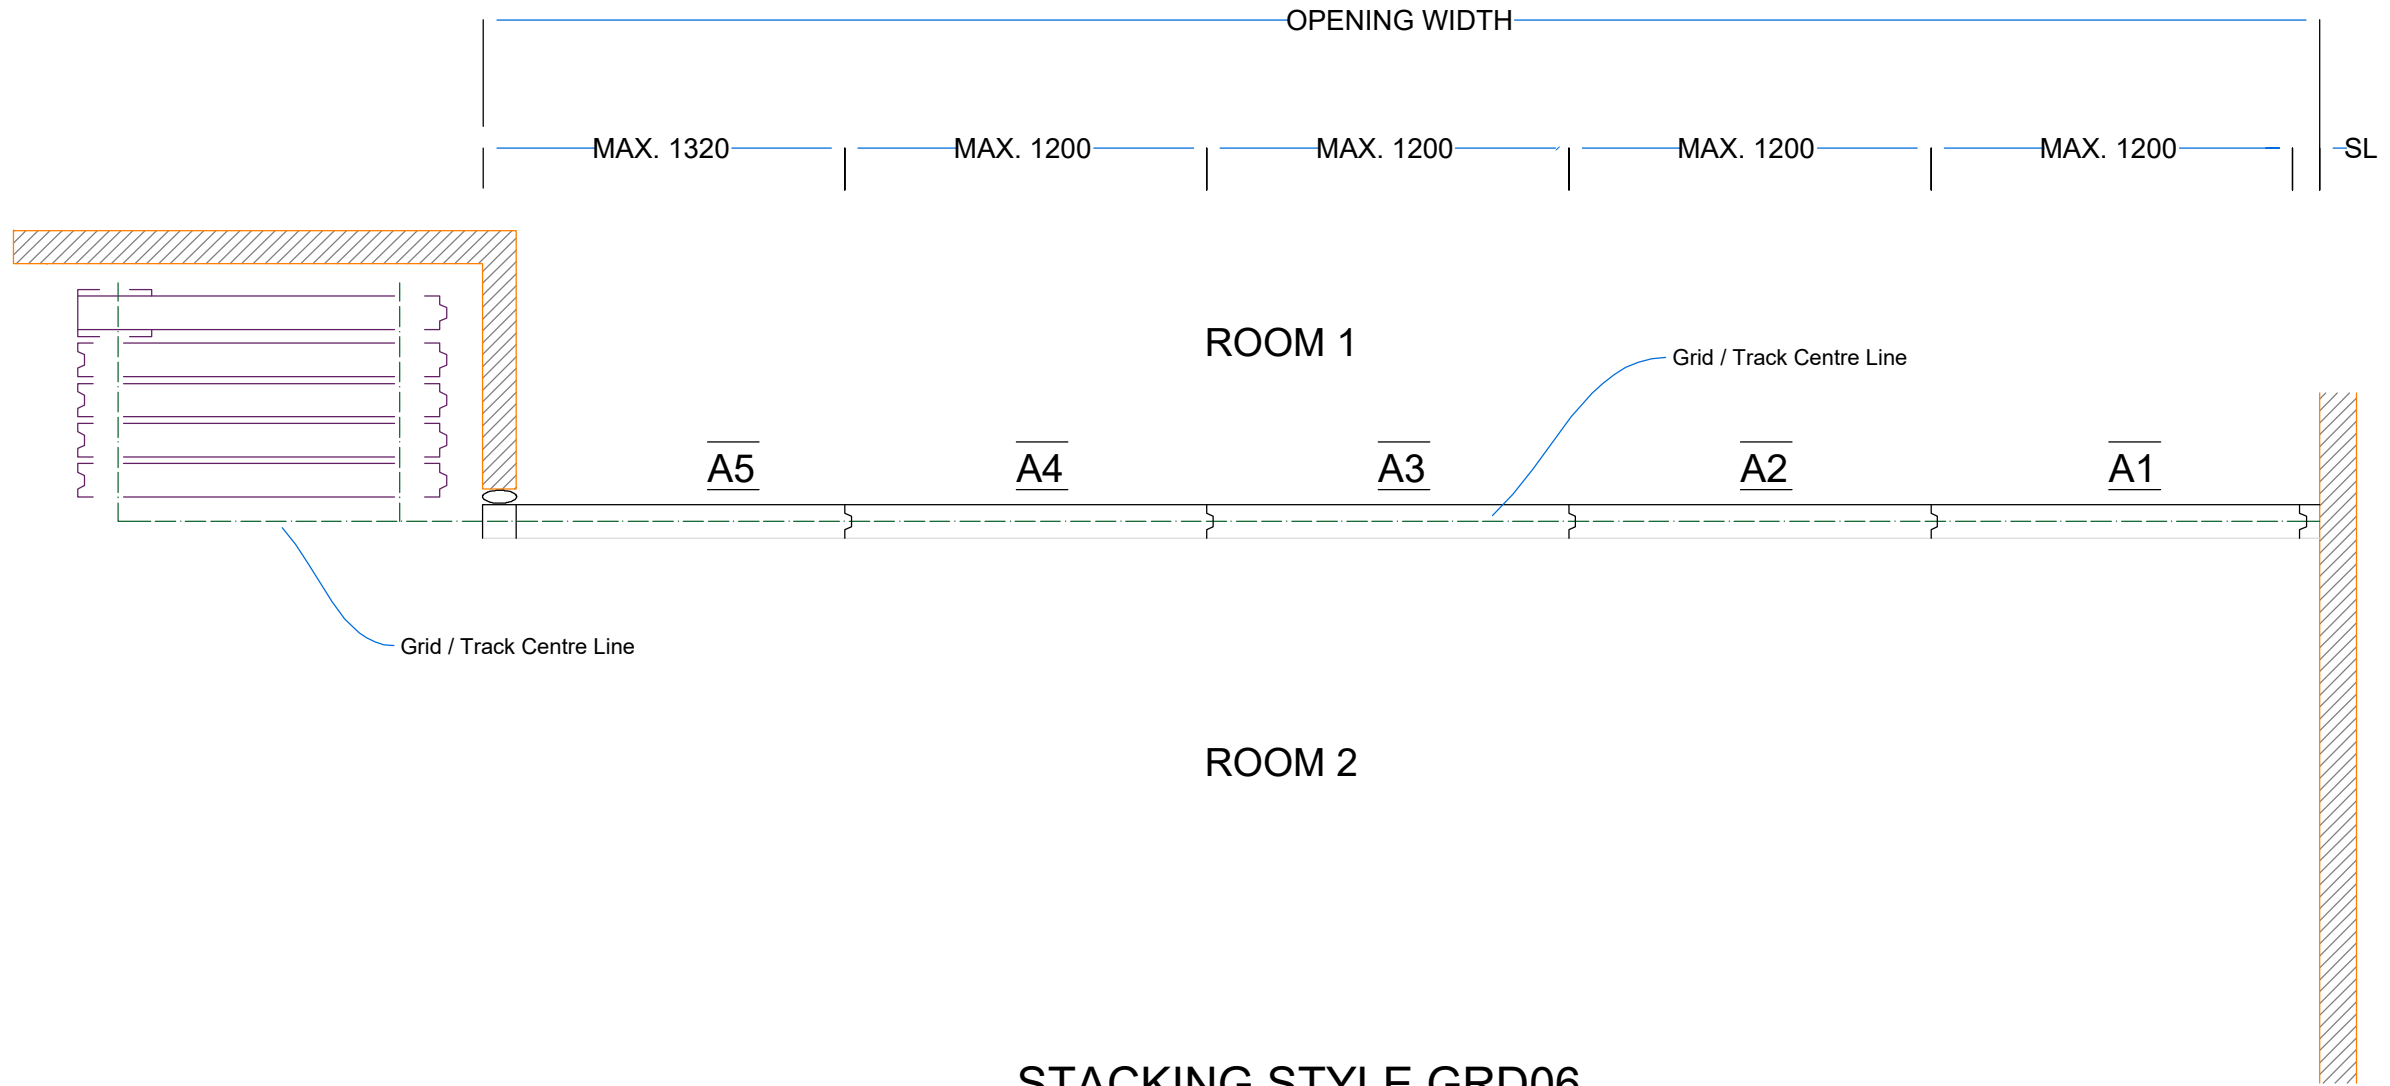

STACKING STYLE GRD06

FOR REFERENCE ONLY

GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED 0 = +/- 0.5 0.0 = +/- 0.1 0.00 = +/- 0.05	THIRD ANGLE PROJECTION 	DESIGNER	REV 1	MANAGING SPACE WITH OPERABLE WALLS AND DOORS
		DRAWN Gary	A3	
UNLESS OTHERWISE SPECIFIED 0.1 1.6/√	DIMENSIONS IN MILLIMETRES	CHECKED Woody	SHEET 1	PROJECT DESCRIPTION TRANS-SPACE DETAIL
		DATE April 11, 2022	SCALE NTS	CONFIGURATION STACKING STYLE GRD06
MACHINED SURFACE FINISH UNLESS OTHERWISE SPECIFIED			CONTRACTOR	JOB NUMBER TR-D-06